


MIG/MAG WELDING

B 200

trafimet
distribution

PRATIX



V peak	113	Ø mm	0.6 - 0.8 1.2 - 1.6	X 60%	200A CO ₂ 150A Mix
------------------	-----	----------------	------------------------	-----------------	----------------------------------


CODE	↔	
F16702.4	3,65 m / 12'	EURO - BD



EN 60974-7



ME0109 (4235)




1/4 NPT
53

Ø mm	Ø in	Cu
0,6	.023	MD0214-06 (1597)
0,8	.030	MD0214-08 (1588)
0,9	.035	MD0214-09 (1589)
1,0	.040	MD0214-10 (1596)
1,2	.045	MD0214-12 (1590)
1,4	.052	MD0214-14 (1598)
1,6	1/16	MD0214-16 (1591)
2,0	5/64	MD0214-20 (1592)
2,4	3/32	MD0214-24 (1593)
2,8	7/64	MD0214-28 (1594)
3,2	1/8	MD0214-32 (1595)

50,9 / 2"





ME0110 (4335)




1/4 NPT
53

Ø mm	Ø in	Cu
0,6	.023	MD0215-06 (7497)
0,8	.030	MD0215-08 (7488)
0,9	.035	MD0215-09 (7489)
1,0	.040	MD0215-10 (7496)
1,2	.045	MD0215-12 (7490)
1,4	.052	MD0215-14 (7498)
1,6	1/16	MD0215-16 (7491)
2,0	5/64	MD0215-20 (7492)
2,4	3/32	MD0215-24 (7493)
2,8	7/64	MD0215-28 (7494)

32,4 / 1-1/4"

MC0415 (4392)	MC0416 (4394)	MC0417 (4391)	MC0418 (4393)
			
67	67	67	67
Ø 12,5	Ø 12,5	Ø 16	Ø 16


MC0419 (4295)



82,8

Ø 9,5

TIPS 4280 / 81 / 82 / ...

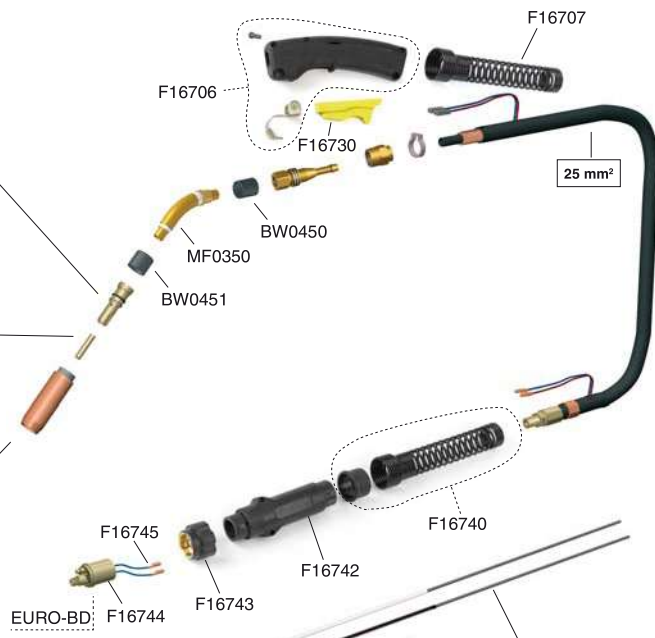

Wire	black color	
	Steel	
0,6 ÷ 0,8 .035" ÷ .045"	4,5 m 13'	GM0275 (44115)

Wire	white color	
	Steel	
1,0 ÷ 1,6 .040" ÷ 1/16"	4,5 m 13'	GM0277 (44215)

Wire	black color	
	Steel	
0,9 ÷ 1,2 .035" ÷ .045"	4,5 m 13'	GM0280 (43115)

STANDARD (REF)