

MIG/MAG WELDING

trafimet
distribution

trafimet
welding & cutting

GPZ MEGA 1



7,6 m / 25'

V peak 113 **Ø** 0.6 ÷ 1.2
0.023" ÷ .045" **X** 60% 200A CO₂
160A Mix

Motor Voltage 24 V DC Wire speed 3÷20 m/min

CODE	↔	IS
MA1549	7,6 m / 25'	EURO
MA1562T	7,6 m / 25'	TWECO®
MA1562M	7,6 m / 25'	MILLER®
MA1562L	7,6 m / 25'	LINCOLN®

CODE	↔	IS
MA1562	7,6 m / 25'	5/8-18 UNF

Liner included

CODE	KIT
AR0170	Tweco® 1/4 KIT
AR0172	Lincoln® KIT
AR0173	Miller® KIT


Kit to be assembled by a qualified technician

TORCH + CONTROL BOX 110V - 115V

CODE	↔	IS
DM0001	7,6 m / 25'	EURO
DM0001T	7,6 m / 25'	TWECO®
DM0001M	7,6 m / 25'	MILLER®
DM0001L	7,6 m / 25'	LINCOLN®

TORCH + CONTROL BOX 220V - 240V

CODE	↔	IS
DM0000	7,6 m / 25'	EURO

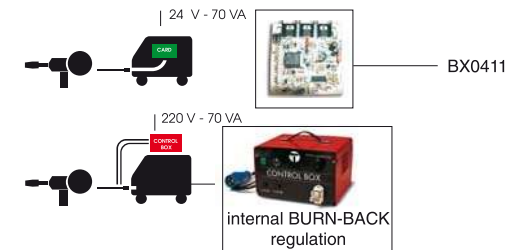



BX0412 220V-240V
BX0466 220V-240V
soft start / external control

BX0413 110V-115V
BX0755 110V-115V
soft start / external control



EN 60974-7





Ø mm	Ø in	Cu
0,6	.023	MD0008-06 (11-23)
0,8	.030	MD0008-08 (11-30)
0,9	.035	MD0008-09 (11-35)
1,0	.040	MD0008-10 (11-40)
1,2	.045	MD0008-12 (11-45)

MC0030 (21-37)	MC0031 (21-50)	MC0032 (21-62)	MC0033 (21-62 FAS)
53 Ø 9,5 3/8"	53 Ø 13 1/2"	53 Ø 16 5/8"	53 Ø 18
STANDARD	(REF)		

	mm	in
FA0192	0.6	.023
FA0195	0.8±1.0	.030±.040
FA0198	1.2	.045
FA0185	0.8±1.0	.030±.040
FA0188	1.2	.045
		Alu

