

MIG/MAG WELDING

GPZ PLUS 36

trafimet
distribution

trafimet
welding & cutting



7,6 m / 25'

V_{peak} 113 **Ø** 0.8 ÷ 1.6
0.030" ÷ 1/16" **X** 60% 300A CO₂
260A Mix

Motor Voltage 24 V DC Wire speed 3÷20 m/min

CODE	↔	IS
MA1579	7,6 m / 25'	EURO
MA1574T	7,6 m / 25'	TWECO®
MA1574M	7,6 m / 25'	MILLER®
MA1574L	7,6 m / 25'	LINCOLN®

CODE	↔	IS
MA1574	7,6 m / 25'	5/8-18 UNF

Liner included

CODE	KIT
AR0170	Tweco® 1/4 KIT
AR0172	Lincoln® KIT
AR0173	Miller® KIT


Kit to be assembled by a qualified technician

TORCH + CONTROL BOX 110V - 115V

CODE	↔	IS
DM0017	7,6 m / 25'	EURO
DM0017T	7,6 m / 25'	TWECO®
DM0017M	7,6 m / 25'	MILLER®
DM0017L	7,6 m / 25'	LINCOLN®

TORCH + CONTROL BOX 220V - 240V

CODE	↔	IS
DM0015	7,6 m / 25'	EURO

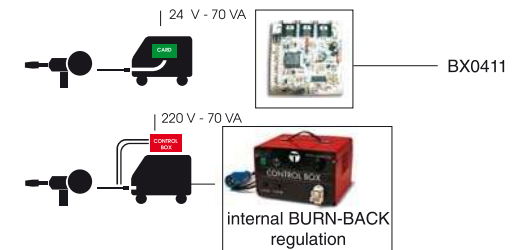

BX0412 220V-240V
BX0466 220V-240V
soft start / external control





BX0413 110V-115V
BX0755 110V-115V
soft start / external control



EN 60974-7



ME0017 (014.0261) plastic white	ME0041 (014.0021) plastic black	ME0517 (014.0023) ceramic	ME0417 -
			

	M6 MD0063-00 (142.0005)		M6 MD0131-00 (142.0011)
	M8 MD0064-00 (142.0020)		M8 MD0132-00 (142.0024)


Ø mm	Ø in	Cu	Cu-Ni	Cu for Al	CuCrZr	Triangular Cu
0,6	.023	MD0009-06 (140.0005)	MD0009-36		MD0009-76	-
0,8	.030	MD0009-08 (140.0051)	MD0009-38	MD0009-58 (141.0001)	MD0009-78 (140.0054)	MD1009-08
0,9	.035	MD0009-09 (140.0169)				
1,0	.040	MD0009-10 (140.0242)	MD0009-40	MD0009-60 (141.0006)	MD0009-80 (140.0245)	MD1009-10
1,2	.045	MD0009-12 (140.0379)	MD0009-42	MD0009-62 (141.0010)	MD0009-82 (140.0382)	MD1009-12



Ø mm	Ø in	Cu	Cu-Ni	Cu for Al	CuCrZr	Triangular Cu	Triangular CuCrZr
0,8	.030	MD0005-08 (140.0114)	MD0005-38	MD0005-58 (141.0003)	MD0005-78 (140.0117)		
0,9	.035	MD0005-09		MD0005-59			
1,0	.040	MD0005-10 (140.0313)	MD0005-40	MD0005-60 (141.0008)	MD0005-80 (140.0316)	MD1005-10	MD1005-80
1,2	.045	MD0005-12 (140.0442)	MD0005-42	MD0005-62 (141.0015)	MD0005-82 (140.0445)	MD1005-12	MD1005-82



MC0026 (145.0126)	MC0027 (145.0078)	MC0440 (145.0078) light	MC0527 -	MC0540 light quick release	MC0109 -	MC0028 (145.0045)	MC0110 (145.0172)
----------------------	----------------------	-------------------------------	--------------------	----------------------------------	-------------	----------------------	----------------------

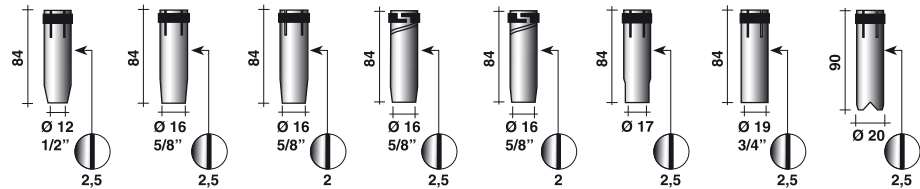

STANDARD (REF)

	mm	in
FA0192	0.6	.023
FA0195	0.8±1.0	.030±.040
FA0198	1.2	.045
FA0185	0.8±1.0	.030±.040
FA0188	1.2	.045

