

## MIG/MAG WELDING

# MEGA 1

trafimet  
distribution

trafimet  
welding & cutting



3 - 4,6 m  
10' - 15'

0,7 Kg  
1,65 lb  
1 m  
3,3'

V peak 113 0,6 ÷ 1,2  
.023" ÷ .045" X 200A CO<sub>2</sub>  
60% 160A Mix

CODE	↔	
MA5165	3 m / 10'	EURO - TW
MA5166	4 m / 12'	EURO - TW
MA5167	4,6 m / 15'	EURO - TW

MA5100	3 m / 10'	TWECO®
MA5101	4 m / 12'	TWECO®
MA5102	4,6 m / 15'	TWECO®
MA5103M	3 m / 10'	MILLER®
MA5104M	4 m / 12'	MILLER®
MA5105M	4,6 m / 15'	MILLER®
MA5103L	3 m / 10'	LINCOLN®
MA5104L	4 m / 12'	LINCOLN®
MA5105L	4,6 m / 15'	LINCOLN®





CODE	↔		+	CODE	KIT
MA5103	3 m / 10'	5/8-18 UNF		AR0170	Tweco® 1/4 KIT
MA5104	4 m / 12'	5/8-18 UNF		AR0172	Lincoln® KIT
MA5105	4,6 m / 15'	5/8-18 UNF		AR0173	Miller® KIT
Liner included				Kit to be assembled by a qualified technician	




EN 60974-7





Ø mm	Ø in	Cu	Cu-Ni	Cu for Al
0,6	.023	MD0008-06 (11-23)	MD0008-36	
0,8	.030	<b>MD0008-08 (11-30)</b>	MD0008-38	MD0008-58
0,9	.035	MD0008-09 (11-35)		
1,0	.040	MD0008-10 (11-40)	MD0008-40	MD0008-60
1,2	.045	MD0008-12 (11-45)	MD0008-42	MD0008-62

MC0030 (21-37)	<b>MC0031 (21-50)</b>	MC0032 (21-62)	MC0033 (21-62 FAS)
-------------------	---------------------------	-------------------	-----------------------

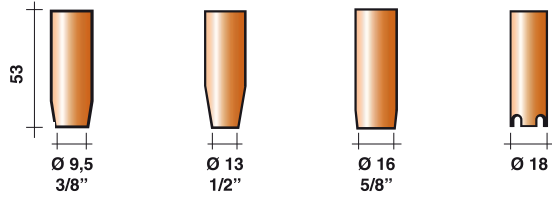

STANDARD

(REF)

