

MIG/MAG WELDING


T 2

trafimet
distribution

PRATIX





V_{peak} 113 **Ø_{mm}** 0.8 - 1.0 / 1.2 **X** 60% 200A CO₂ / 150A Mix

CODE	↔	
F16902MK3	3 m / 10'	TWECO®
F16902MK4	4 m / 12'	TWECO®
F16902MK5	4,6 m / 15'	TWECO®
F16902E3	3 m / 10'	EURO - TW
F16902E4	4 m / 12'	EURO - TW
F16902E5	4,6 m / 15'	EURO - TW



EN 60974-7



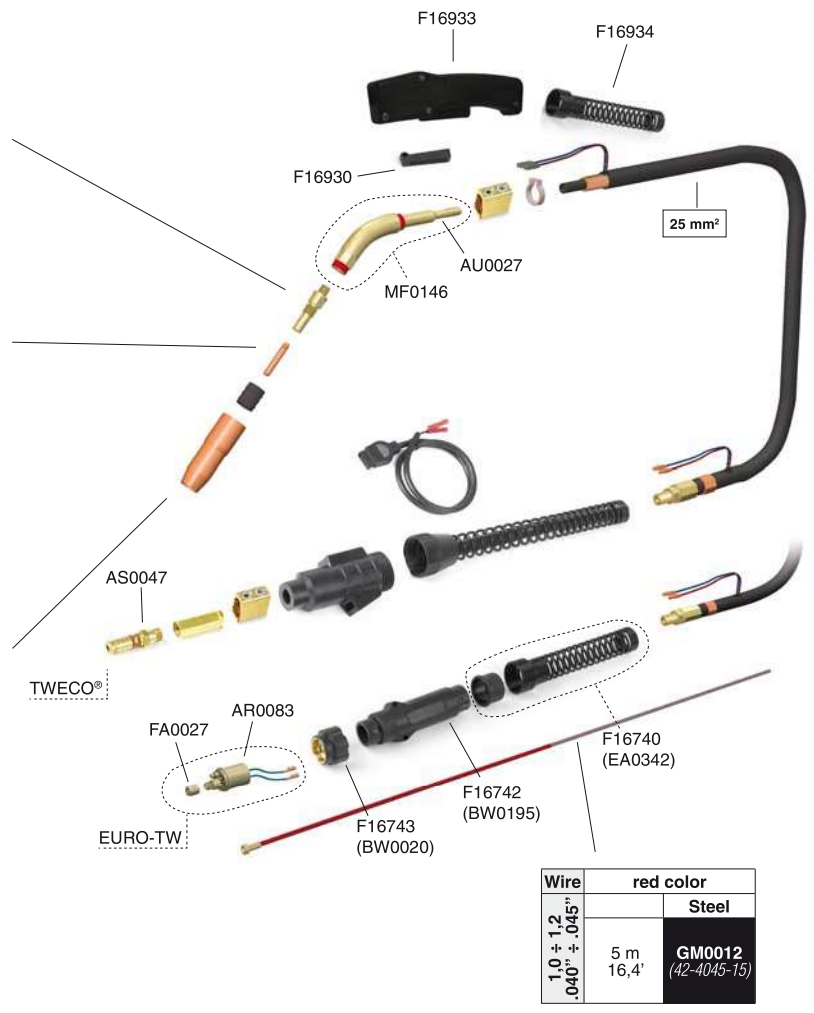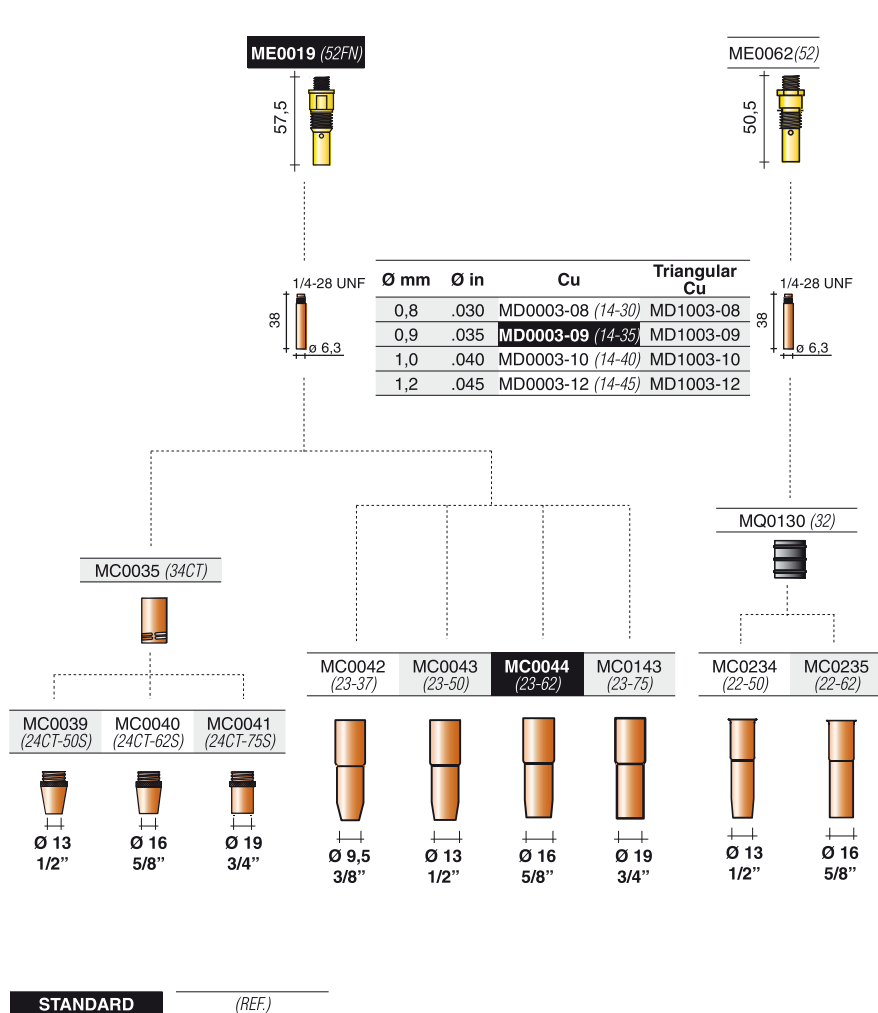

Wire	red color	
		Steel
1,0 ± 1,2 .040" ± .045"	5 m 16,4'	GM0012 (42-4045-15)