

## MIG/MAG WELDING

# TGASKISS 400

trafimet  
distribution

trafimet  
welding & cutting



3 - 4,6 m  
10' - 15'

1,5 Kg  
3,31 lb

V  
peak

113



0,8 - 1,6 mm  
.030" - 1/16"



X  
60% 450A CO<sub>2</sub>  
400A Mix

CODE	↔	⊠
MA5492	4,6 m / 15'	5/8-18 UNF
MA5494	7,6 m / 25'	5/8-18 UNF
MA5492T	4,6 m / 15'	TWECO®
MA5494T	7,6 m / 25'	TWECO®
MA5492M	4,6 m / 15'	MILLER®
MA5494M	7,6 m / 25'	MILLER®
MA5492L	4,6 m / 15'	LINCOLN®
MA5494L	7,6 m / 25'	LINCOLN®



CODE	↔	⊠	+	CODE	KIT
MA5492	4,6 m / 15'	5/8-18 UNF		AR0170	Tweco® 1/4 KIT
MA5494	7,6 m / 25'	5/8-18 UNF		AR0172	Lincoln® KIT
				AR0173	Miller® KIT

Liner included

Kit to be assembled by a qualified technician




EN 60974-7




ME0122 (402-3) ME0123 (404-3) BW0685 EA0219 (402-16)



ME0120 (404) ME0121 (404-1)




Ø mm	Ø in	Cu
0,8	.030	MD0225-08 (403-30)
0,9	.035	MD0225-09 (403-35)
1,2	.045	MD0225-12 (403-45)
1,4	.052	MD0225-14 (403-52)
1,6	1/16	MD0225-16 (403-116)




Ø mm	Ø in	Cu
0,8	.030	MD0220-08 (403-1-30)
0,9	.035	MD0220-09 (403-1-35)
1,0	.040	MD0220-10 (403-1-40)
1,2	.045	<b>MD0220-12 (403-1-45)</b>
1,4	.052	MD0220-14 (403-1-52)
1,6	1/16	MD0220-16 (403-1-116)
2,0	5/64	MD0220-20 (403-1-564)

MC0433 (401-6-50) MC0434 (401-6-62) **MC0431 (401-5-62)** MC0435 (401-6-75) MC0396 (401-4-75) MC0432 (401-5-75)

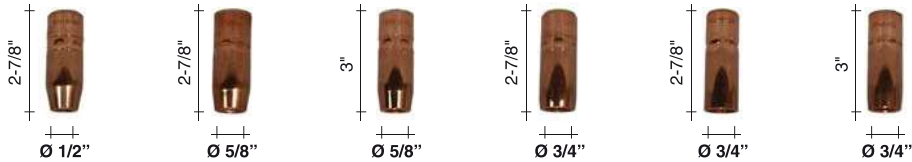

STANDARD (REF)

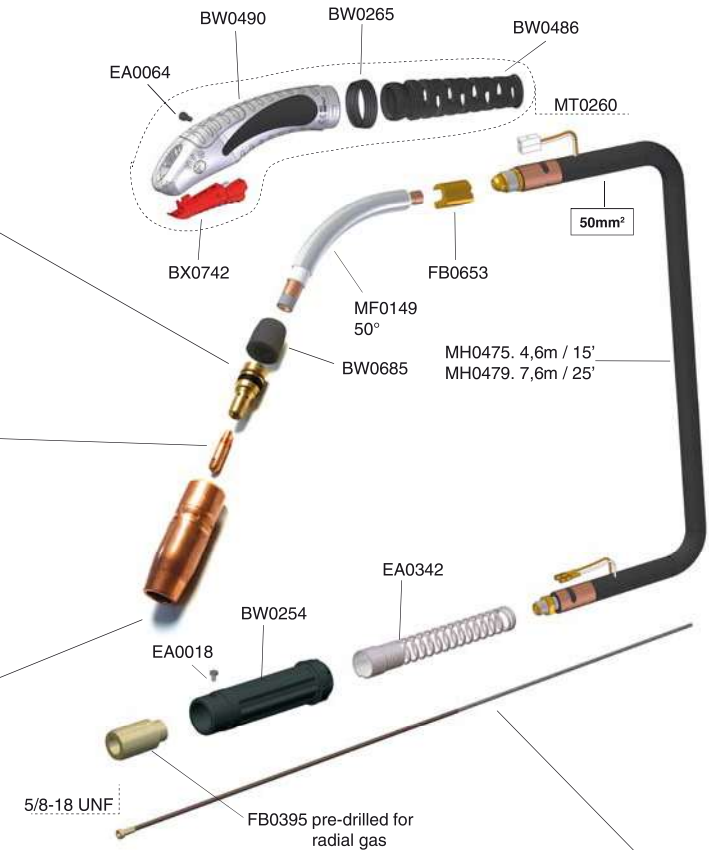

Wire	grey color	
		Steel
1,2 ÷ 1,6 .045" ÷ 1/16"	4,6 m 15'	GM0842
	7,6 m 25'	GM0843