

## MIG/MAG WELDING

# TPLUS 24

trafimet  
distribution

trafimet  
welding & cutting



3 - 5 m  
10' - 16,4'

1.2 Kg  
2,76 lb

1 m  
3,28'

V  
peak

113

Ø  
mm

0,8 - 1,2 mm  
.030" - .045"

X  
60%

250A CO<sub>2</sub>  
220A Mix

CODE	↔	⏏
MA3123	3 m / 10'	EURO
MA3124	4 m / 12'	EURO
MA3125	5 m / 16,4'	EURO



EN

Quick Trigger  
Replacement

FR

Remplacement rapide  
de la gâchette

ES

Sustitución rápida  
del botón



PT

Substituição rápida  
do botão





EN 60974-7



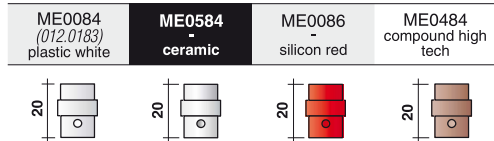

Ø mm	Ø in	Cu	Cu-Ni	Cu for Al	CuCrZr
0,6	.023	MD0008-06 (140.0008)	MD0008-36		
0,8	.030	MD0008-08 (140.0059)	MD0008-38	MD0008-58 (141.0002)	MD0008-78 (140.0062)
0,9	.035	MD0008-09 (140.0177)			
1,0	.040	<b>MD0008-10 (140.0253)</b>	MD0008-40	MD0008-60 (141.0007)	MD0008-80 (140.0256)
1,2	.045	MD0008-12 (140.0387)	MD0008-42	MD0008-62	MD0008-82

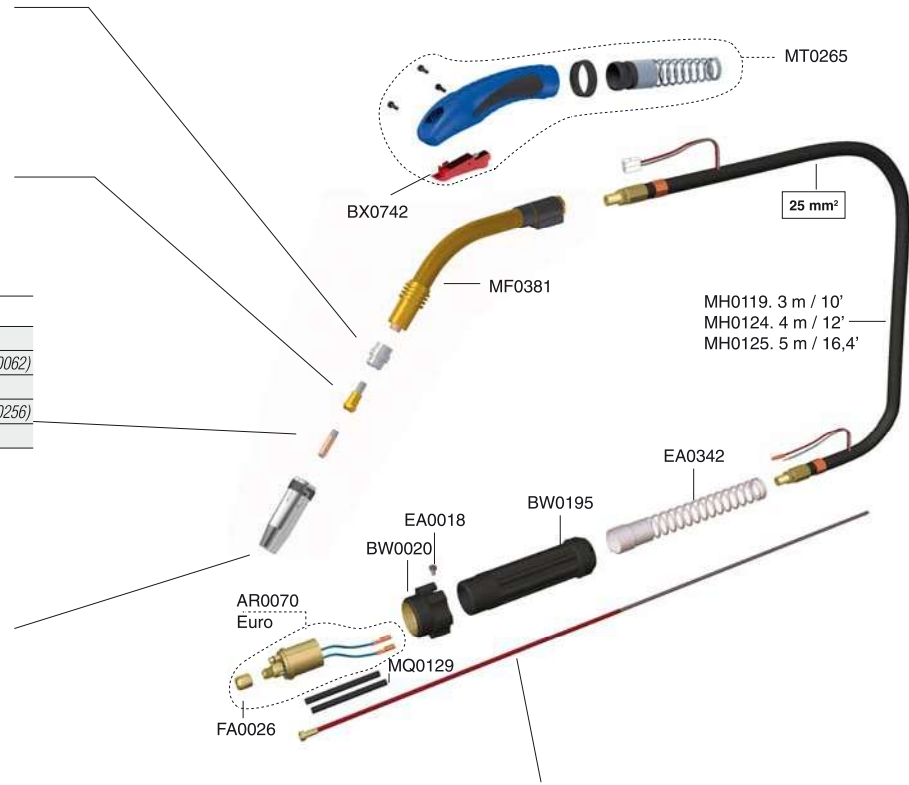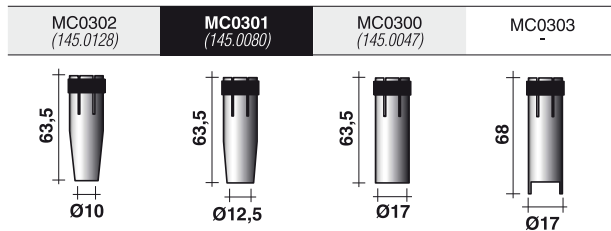

Wire	red color	
		Steel
1,0 ± 1,2 .040" ± .045"	3 m / 10'	<b>GM0510</b> (124.0026)
	4 m / 12'	<b>GM0511</b> (124.0031)
	5 m / 16,4'	<b>GM0512</b> (124.0035)

STANDARD (REF)